


Rectangle Pointer Type Electricity Panel Meter

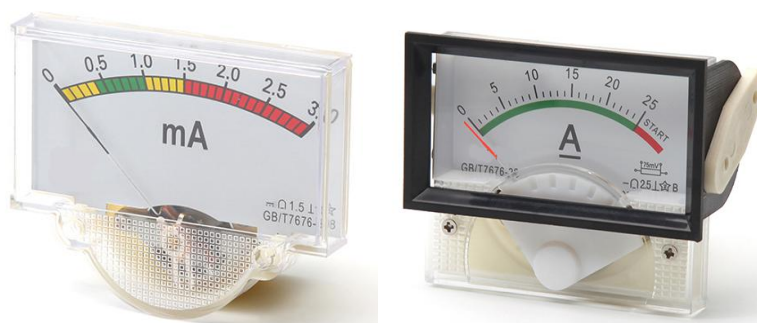

Summarization

Product name	Rectangle Pointer Type Electricity Panel Meter
Measuring Range	DC 0-3.0mA 0-25A
Size	80*44mm; 64*56mm
Accuracy	1.5
Voltage	AC 110V/220V/380V
Zero position	left of scale line
Shell color	White
Certification	CE PSE RoHS SGS
Inner structure	Moving coil
Working temperature	-10~55°C

Basic Specification

Name		Normal Specification	Remark
AC ammeter	A	0.5A-20A	Can be directly connected
	A	30A-100A	Can be directly connected
	A	10/5A-10k/5A	Secondary current passed by CT
AC voltmeter	V	10V-750V	Can be directly connected
	kV	1kV-35kV	100V secondary voltage passed by voltage transformer

DC ammeter	uA mA	50uA-500uA 1mA-500mA	Can be directly connected
	A	1A-15A	Can be directly connected
	A	15A-3kA	Outer attached shunt 75mV 60mV 50mV
DC voltmeter	V	3V-600V	Can be directly connected
	kV	1kV-3kV	Outer attached resistance
Frequency meter	Hz	45-55Hz 55-65Hz	36V, 100V, 127V, 220V, 380V
Power meter	KW Var	100V 380V 380-380kV	100V secondary voltage passed by voltage; Secondary current passed by current transformer 5-10kA/5A
Power factor meter	Cos	COS Φ =0.5-1-0.5	100V/5A 220V/5A 380V/5A

Dimensions

